


CONNECTIONS ISCAD V50



- 2x CAN (J1939)
- 12 V Supply
- Start/ Stop
- ➔ 3 x M12 Plug

- Flush shaft
- 25 mm Diameter
- 40 mm length

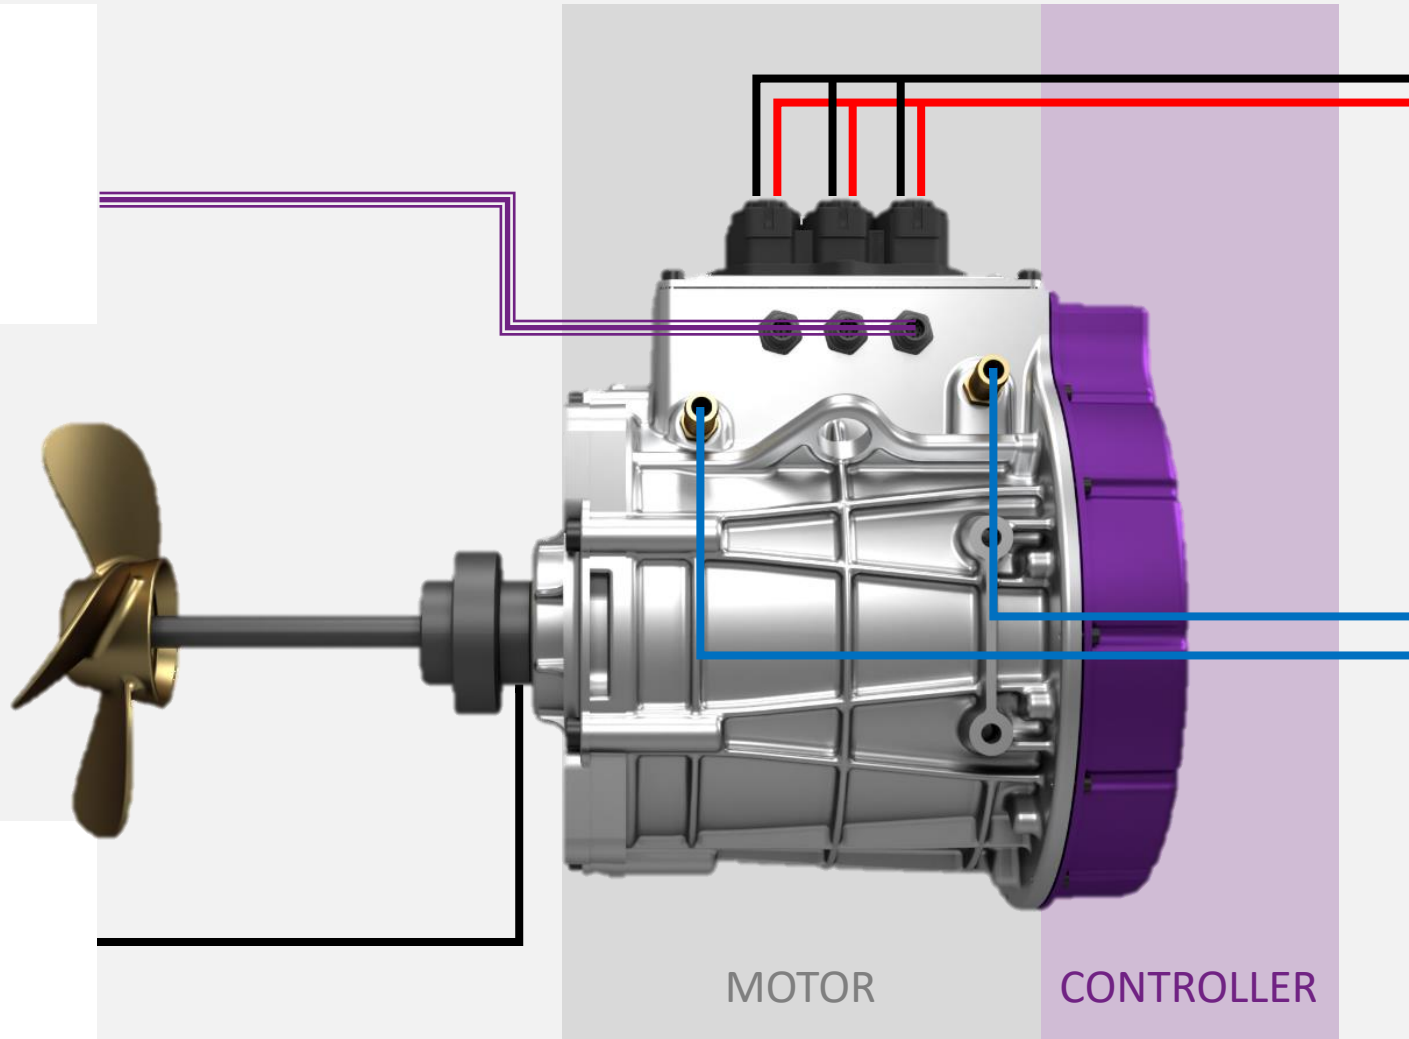

- 3x 48 V plus
- 3x 48 V minus
- ➔ 6 x 95 mm²

- Water-Glycol 50/50
- 7 l/min
- Max. 45°C for 50 kW
Continuous
- ➔ 2 x 16mm Stutzen